GPS-900 – powerful and reliable!

The GPS series from Argus stands for powerful and reliable power supplies in the levels 600W, 700W, 800W and 900W. Whether for upgrading existing systems or for configuring new ones, thanks to 80PLUS® Gold 230V EU certification and state-of-the-art components, the GPS series will keep you up to date. To secure the built-in hardware and the power supply unit itself, we did not make any compromises and have equipped the power supply units of the GPS series with a total of five protective circuits (OPP, SCP, OVP, OCP and NLP).

The entire GPS series is equipped with a smooth-running 140mm fan and an intelligent fan control, or IFC for short. The IFC ensures that the fan of the power supply only starts cooling when the internal temperature of the power supply exceeds 65°C. If the internal temperature falls below 65°C, the fan is switched back to idle mode - this keeps the noise level of the power supply unit extremely low.

When it comes to the variety of connections, we also kept an eye on the greatest possible efficiency and, with the exception of the 20+4pin connection, designed all other cable strands as flat ribbon versions - saving space and time when laying. The GPS-900 has four PCIe 6+2pin and six S-ATA connections available. With 75A on the 12V line, there is more than enough power available for potent hardware. We round off the overall package with a 60-month manufacturer's guarantee for the entire GPS series.

✓80PLUS® Gold 230V EU certification (up to 93.1% efficiency)

✓Intelligent fan control (IFC)

✓OPP, SCP, OVP, OCP and NLP

✓75A on the 12V line

✓60 Months warranty

Argus GPS-900

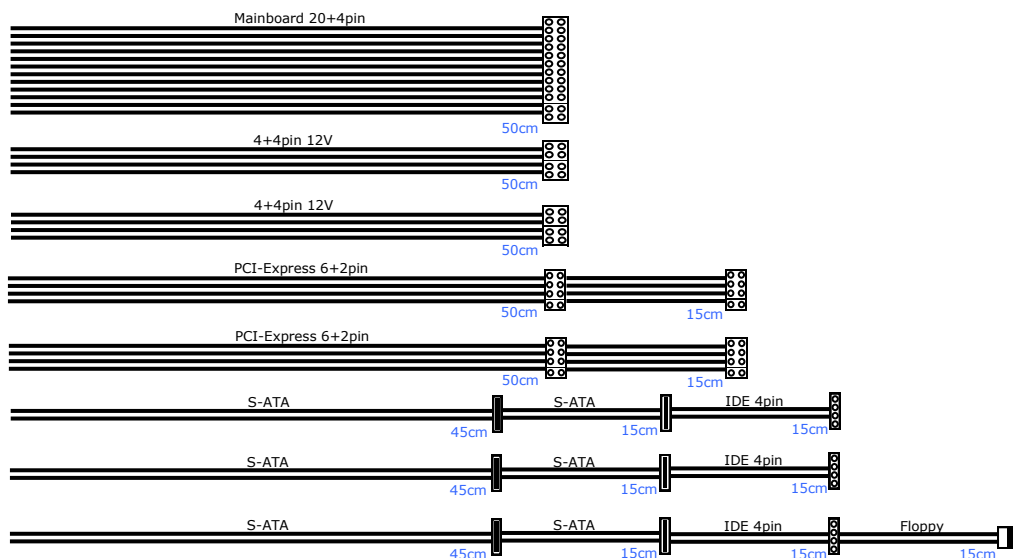## Specifications

Output	900W
Mainboard 20+4Pin	1x
4Pin/ 4+4Pin/ 8Pin 12V	- / 2x / -
PCI-Express 6+2Pin	4x
PCI-Express 6Pin	-
IDE 4Pin	3x
S-ATA	6x
Floppy	1x
Fan monitoring	-
100/240V Input	•/• (auto.)
PFC	Active
ATX-Standard	ATX 2.4
Fan dimension	1x 140mm
Fan control	Automatic (IFC)
Noise level	<65°C 0dB >65°C 23.5-38.4dB
Cable management	-
Protection circuit	OPP, SCP, OVP, OCP, NLP
PSU dimensions (H/W/D)	86/150/160mm
Package dimensions (H/W/D)	210/280/100mm
Weight (net)	2.08kg
Weight (gross)	2.43kg
Packing units (VE/VPE/PAL)	1/5/210
Warranty	60 Months
Article number	88882209
EAN-Code	4260455647120
Scope of delivery	Manual (german, english), Power cord, Screws, Cable ties
80+ certificate	

• = existing
- = non existing

Connectors

AC Input		100V/240V 47-63Hz max. 10/5A				
DC Output		3,3V	5V	12V	-12V	5Vsb
GPS-900	Max. Current	20A	20A	75A	0.3A	2.5A
	Max. Combined Power	100W		900W	3.6W	12.5W
		900W				

Mainboard 20+4pin — 50cm
4+4pin 12V — 50cm
4+4pin 12V — 50cm
PCI-Express 6+2pin — 50cm — 15cm
PCI-Express 6+2pin — 50cm — 15cm
S-ATA 45cm — S-ATA 15cm — IDE 4pin 15cm
S-ATA 45cm — S-ATA 15cm — IDE 4pin 15cm
S-ATA 45cm — S-ATA 15cm — IDE 4pin 15cm — Floppy 15cm

Noise curve of the fan