


**RoHS Compliant**  
**Serial ATA Flash Drive**  
AS350X Product Specifications

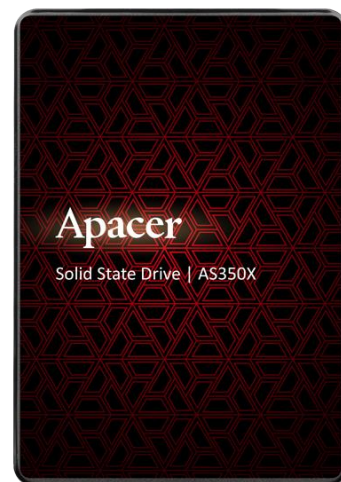

**Jan, 2021**

**Version 1.0**

**Apacer Technology Inc.**

1F, No.32, Zhongcheng Rd., Tucheng Dist., New Taipei City, Taiwan, R.O.C

Tel: +886-2-2267-8000 Fax: +886-2-2267-2261

[www.apacer.com](http://www.apacer.com)

## Specifications Overview:

- **Compliance with SATA Revision 3.1**
  - SATA 6.0 Gbps interface
  - Backward compatible with SATA 1.5 and 3.0 Gbps interfaces
- **Capacity**
  - 128GB, 256GB, 512GB, 1TB
- **Performance\***
  - Seq. Read / Write:
    - 128GB : Up to 560 / 540 MB/s
    - 256GB : Up to 560 / 540 MB/s
    - 512GB : Up to 560 / 540 MB/s
    - 1TB : Up to 560 / 540 MB/s
  - (4K) Random Read / Write
    - 128GB : Up to 38K / 75K IOPS
    - 256GB : Up to 81K / 74K IOPS
    - 512GB : Up to 87K / 80K IOPS
    - 1TB : Up to 93K / 80K IOPS
- **Flash Management**
  - Global Wear Leveling
  - S.M.A.R.T.
  - Power Failure Management
  - TRIM
- **NAND Flash Type: 3D NAND**
- **MTBF: 1,500,000 hours**
- **Endurance (in Terabytes Written: TBW)**
  - 128 GB: 75 TBW
  - 256 GB: 180 TBW
  - 512 GB: 320 TBW
  - 1TB: 600 TBW
- **Temperature Range**
  - Operating:
    - Standard: 0°C to 70°C
  - Storage: -40°C to 85°C
- **Supply Voltage**
  - 5.0 V ± 5%
- **Power Consumption\***
  - Active mode:
    - 1,260 mW (128GB)
    - 1,450 mW (256GB)
    - 1,360 mW (512GB)
    - 1,620 mW (1TB)
  - Idle mode:
    - 320 mW (128GB)
    - 325 mW (256GB)
    - 320 mW (512GB)
    - 320 mW (1TB)
- **Connector Type**
  - 7-pin SATA signal connector
  - 15-pin SATA power connector
- **Form Factor**
  - 2.5"
  - Dimensions with 7mm enclosure: 100.00 x 69.85 x 6.90, unit: mm
- **Shock & Vibration\*\***
  - Shock: 1,500 G
  - Vibration: 15 G
- **SATA Power Management Modes**
- **RoHS Comply**

\*Varies from capacities. The values for performances and power consumptions presented are typical and may vary depending on flash configurations or platform settings.

\*\*Non-operating

## 1.1 Part Number Listing

Capacity	Bulk P/N	Retail P/N
128GB	AP128GAS350XR	AP128GAS350XR-1
256GB	AP256GAS350XR	AP256GAS350XR-1
512GB	AP512GAS350XR	AP512GAS350XR-1
1TB	AP1TBAS350XR	AP1TBAS350XR-1

## 1.2 Revision History

Revision	Description	Date
1.0	Official release	01/07/2021
1.1	Performance update	04/26/2021

## Global Presence

### Taiwan (Headquarters)

#### Apacer Technology Inc.

1F., No.32, Zhongcheng Rd., Tucheng Dist.,  
New Taipei City 236, Taiwan R.O.C.  
Tel: 886-2-2267-8000  
Fax: 886-2-2267-2261  
[amtsales@apacer.com](mailto:amtsales@apacer.com)

### Japan

#### Apacer Technology Corp.

6F, Daiyontamachi Bldg., 2-17-12, Shibaura, Minato-Ku,  
Tokyo, 108-0023, Japan  
Tel: 81-3-5419-2668  
Fax: 81-3-5419-0018  
[jpservices@apacer.com](mailto:jpservices@apacer.com)

### China

#### Apacer Electronic (Shanghai) Co., Ltd

Room D, 22/FL, No.2, Lane 600, JieyunPlaza,  
Tianshan RD, Shanghai, 200051, China  
Tel: 86-21-6228-9939  
Fax: 86-21-6228-9936  
[sales@apacer.com.cn](mailto:sales@apacer.com.cn)

### U.S.A.

#### Apacer Memory America, Inc.

46732 Lakeview Blvd., Fremont, CA 94538  
Tel: 1-408-518-8699  
Fax: 1-510-249-9551  
[sa@apacerus.com](mailto:sa@apacerus.com)

### Europe

#### Apacer Technology B.V.

Science Park Eindhoven 5051 5692 EB Son,  
The Netherlands  
Tel: 31-40-267-0000  
Fax: 31-40-290-0686  
[sales@apacer.nl](mailto:sales@apacer.nl)

### India

#### Apacer Technologies Pvt Ltd,

Unit No.201, "Brigade Corner", 7<sup>th</sup> Block  
Jayanagar,  
Yediyur Circle, Bangalore – 560082, India  
Tel: 91-80-4152-9061  
Fax: 91-80-4170-0215  
[sales\\_india@apacer.com](mailto:sales_india@apacer.com)