

Reolink Go PT Plus

reolink
Be Prepared, Be Reolink

2K 4MP Wireless 4G PT Camera, with Smart Detection

- Person/Vehicle Detection
- 2K 4MP Super HD
- 355° Pan & 140° Tilt
- Battery/Solar-Powered



* Needs a Nano SIM card and a cellular data plan before using.

No Power Connection? No WiFi? Go PT Plus Is Always Available with 4G Network

Reolink Go PT Plus supports 3G/4G LTE cellular network and 355° pan & 140° tilt. It also has a higher resolution of 2K 4MP Super HD and more intelligent person/vehicle detection.



Rechargeable Battery

Frequent charges? No need. Reolink Go PT Plus is equipped with a long-lasting battery with a long run time between charges.

**Comes with the camera. Non-removable.*



Solar Powered

The camera can be connected to [Reolink solar panel](#) via a USB cable. Non-stop solar power means non-stop protection!

** Sold separately. Designed for Reolink battery-powered cameras ONLY.*




Work for Different Scenarios

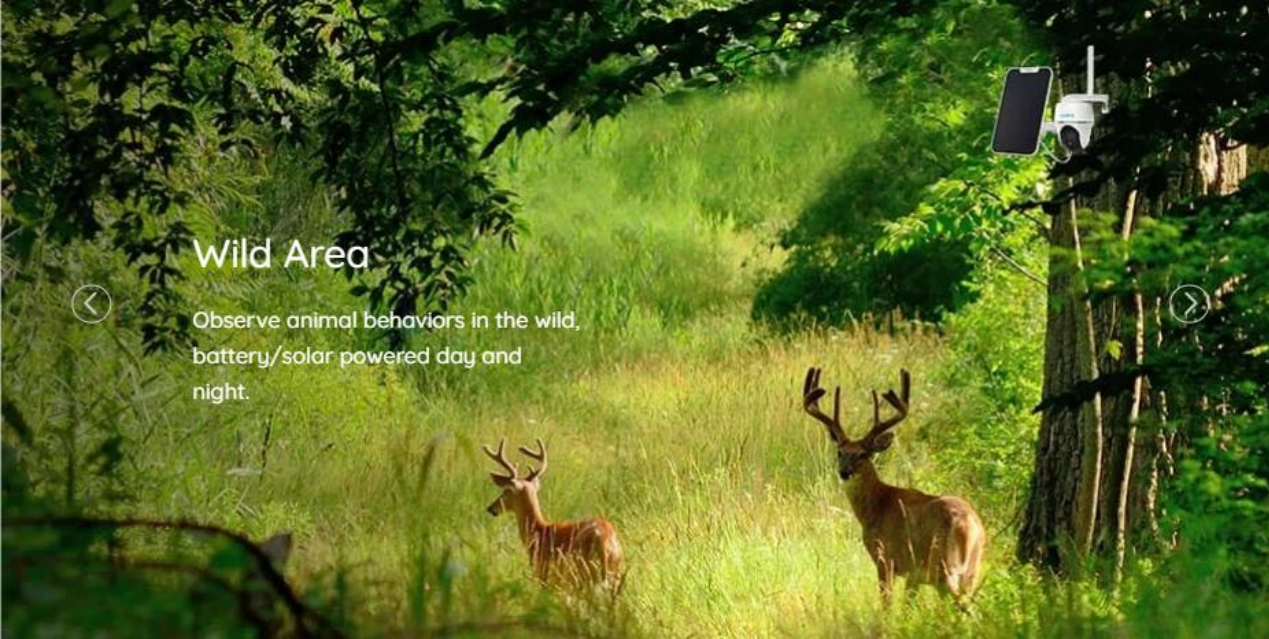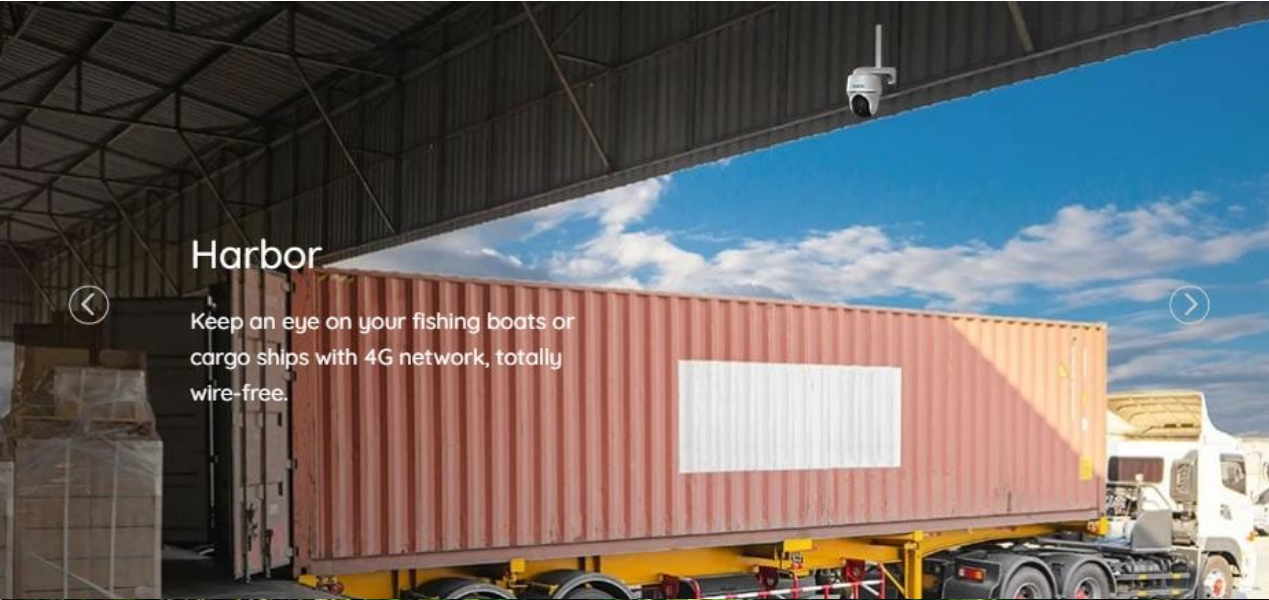

355° Pan & 140° Tilt, a Wide Angle of View

Cover every corner of your place


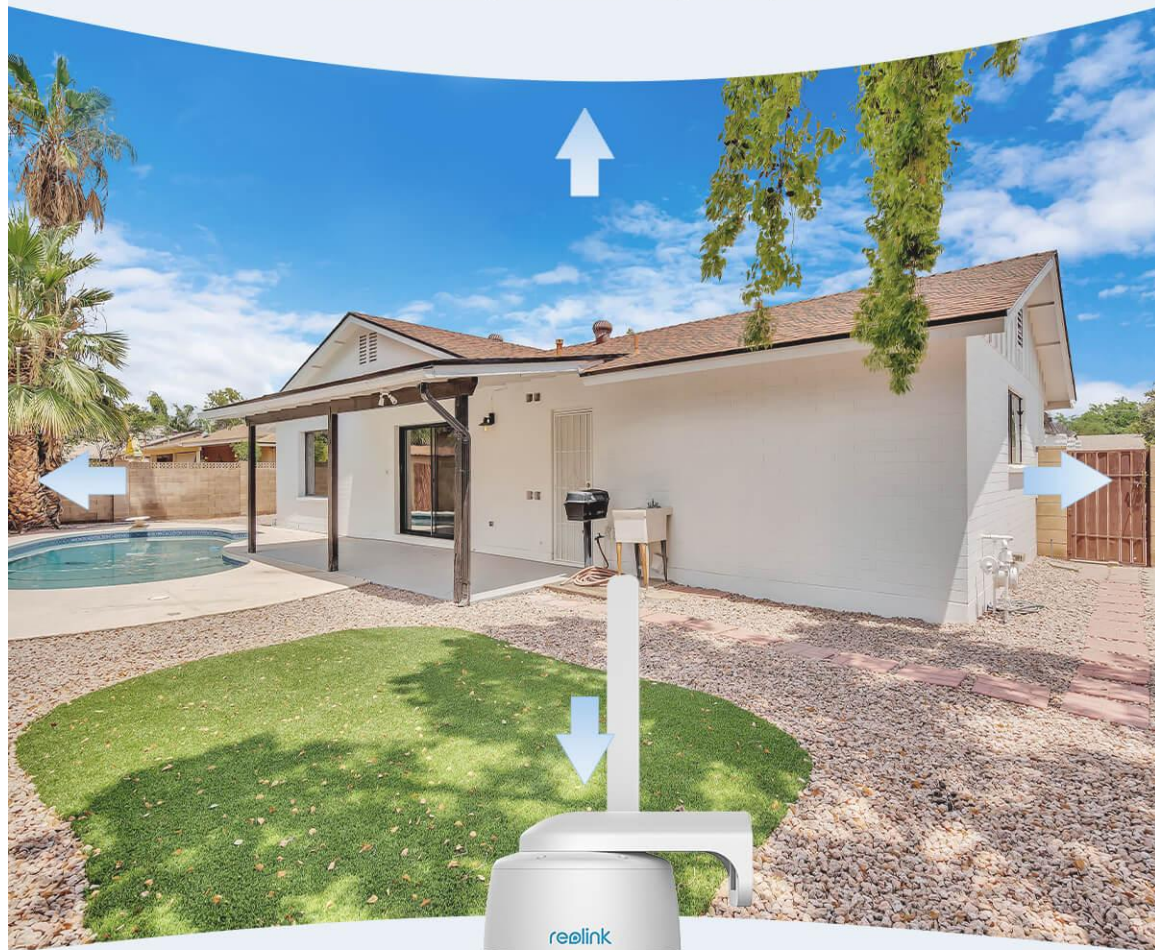


2K Super HD Resolution Day and Night

See everything clearly with 16X digital zoom



Smart Person/Vehicle Alerts & Playback

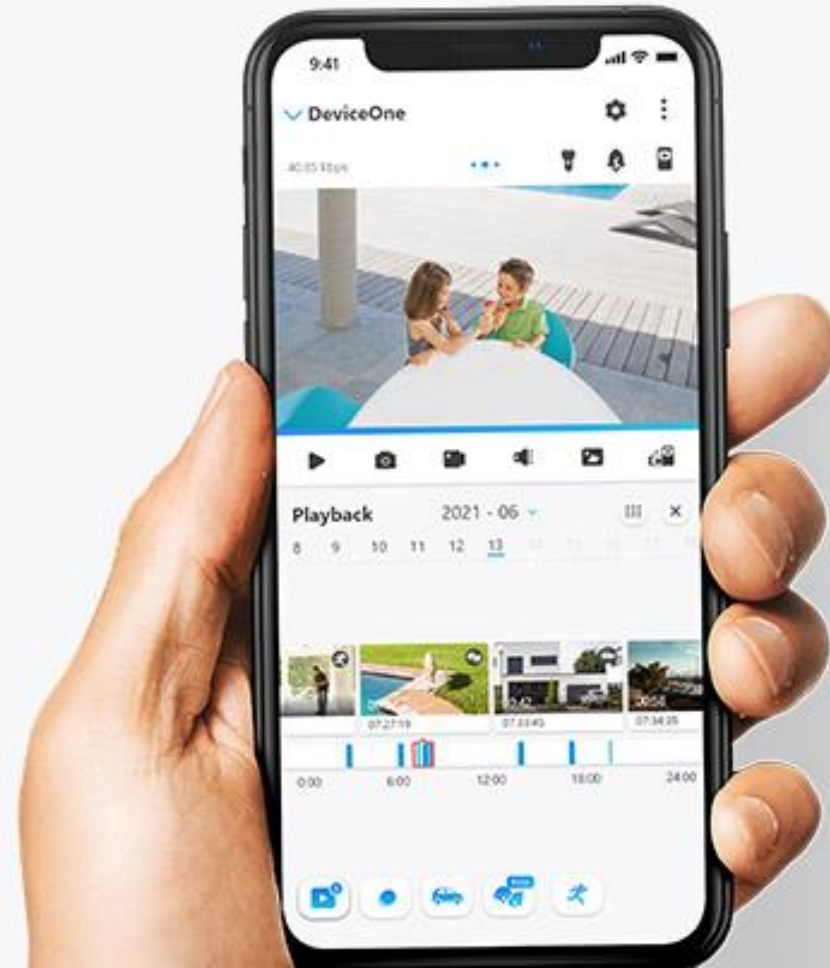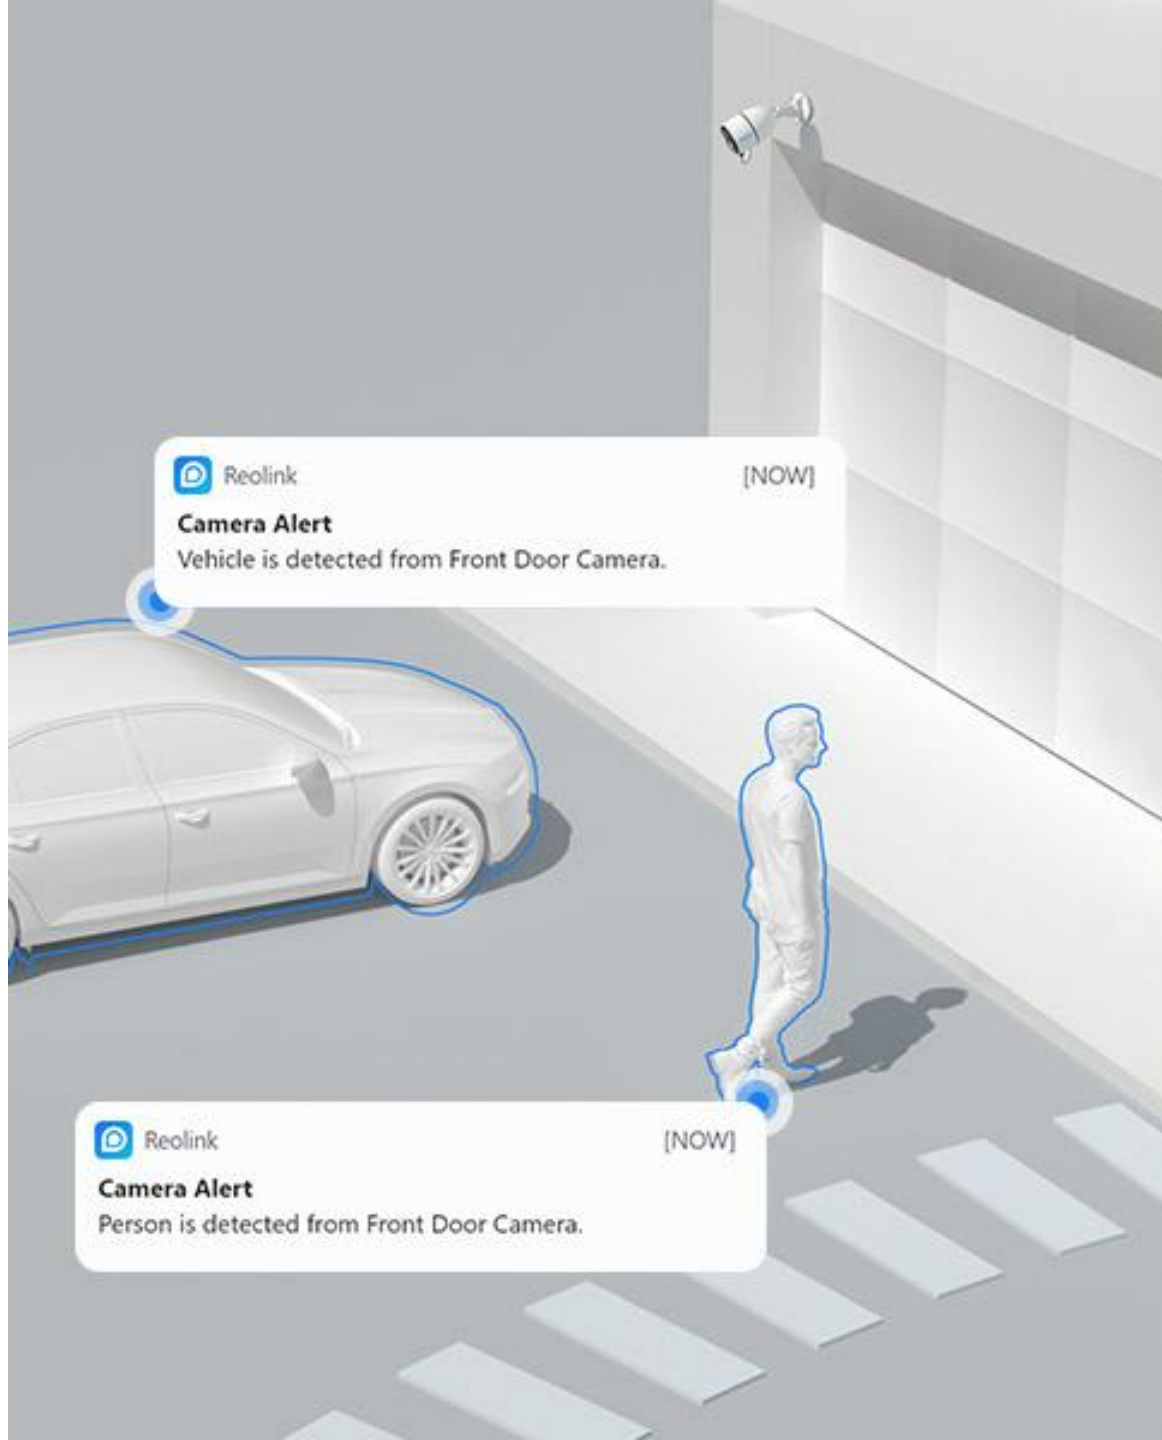



1

Smart Real-Time Alert

Get alerted when the camera senses the movement. You can configure when you want to turn on notifications - all the time or on a specific schedule.



App

Instant push notifications right on your mobile device.




Email

Email alert with on-scene snapshots.



Siren

Powerfully loud siren will be triggered when motion is detected. You can also customize it with your own desired voice alert.

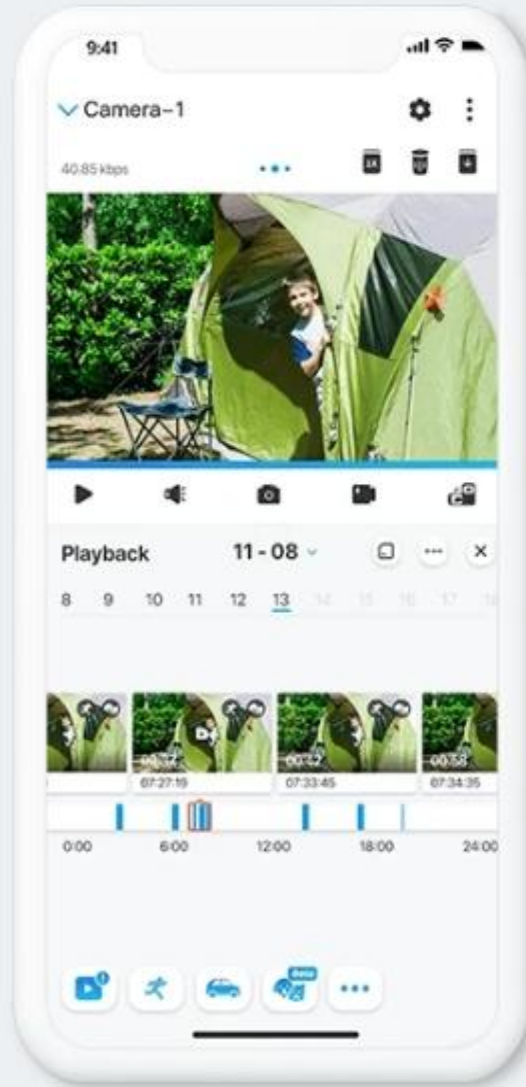

2



Live View & Playback


Via free Reolink App or Client, you can click to check what's going on with your home or business, and respond instantly; search the videos you saved, pinpoint which you want to review, and play it back.

Available on



Download for macOS

Download for Windows

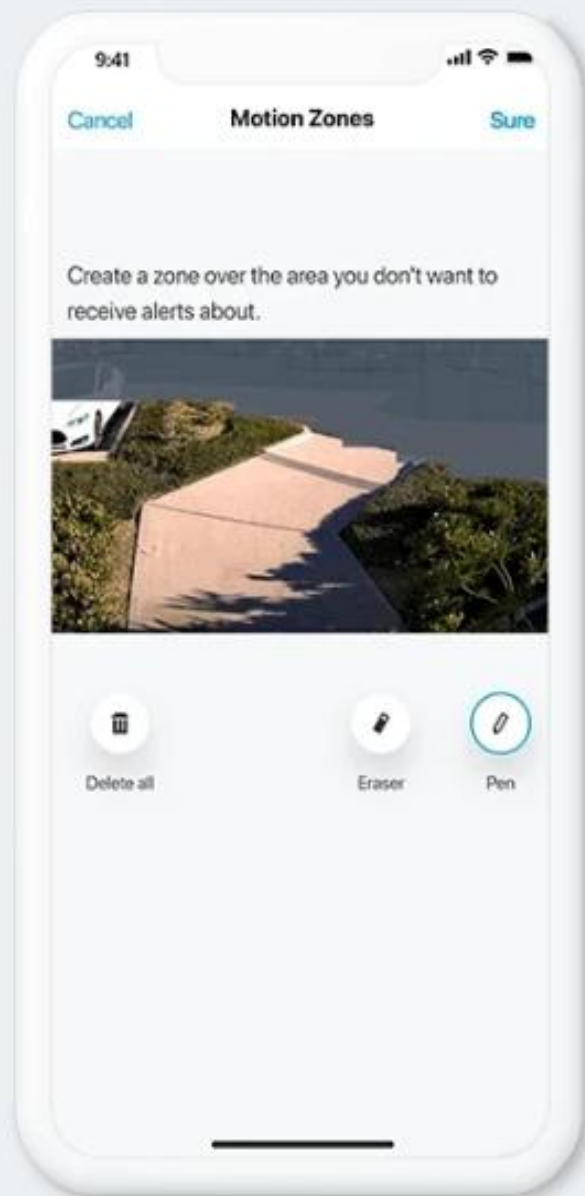

Never Miss a Thing Focus on What Matters Most

You can customize the motion zone to your like, deciding where objects' movements will be detected and where they will not.

 Motion Zone

What's in the Box & Setup Guide (with Video) –

x1



Reolink Go PT Plus

x1



Built-in 32GB Micro SD Card

x1




Reset Needle

x1



Bracket

x1



Mounting Template

x1



Surveillance Sticker

x1



Quick Start Guide

x1



Pack of Screws

x1



USB Cable

Gallery & Specs



- 1 Speaker
- 5 Built-In Mic

- 2 6 IR LEDs
- 6 Lens

- 3 Status LED
- 7 Daylight Sensor

- 4 Built-In PIR Sensor



1 Antenna

2 Battery Status LED

3 Micro USB Port

4 Power Switch

5 Reset Hole

6 Nano SIM Card Slot

7 Micro SD Card Slot

Reolink-Go-PT-Plus-IP-Camera-Specifications		
	Model	Reolink Go PT Plus
Video & Audio	Image Sensor	1/3" CMOS Sensor
	Video Resolution	2560 x 1440 (4.0 megapixel) at 15 frames/sec
	Video Format	H.265
	Field of View	Fixed lens, horizontal: 95 °, vertical: 57 °, 115 °diagonal
	Infrared Night Vision	Up to 10 meters (33ft) (LED: 6pcs/14mil/850nm)
	Digital Zoom	16X digital zoom
	Audio	Two-way audio
PIR Detection & Alerts	Smart Alarm	PIR detection/human detection/vehicle detection
	PIR Detecting Distance	Adjustable up to 10m (33ft)
	PIR Detecting Angle	120 °horizontal
	Audio Alert	Customizable verbal alerts
	Recording	Motion-triggered recording
	Other Alerts	Instant email alerts and push notifications
3G/4G	Frequency Bands	Europe LTE FDD: B1/B3/B5/B7/B8/B20 WCDMA: B1/B5/B8
		America LTE FDD: B2/B4/B12 WCDMA: B2/B4/B5
		Australia LTE FDD: B1/B2/B3/B4/B5/B7/B8/B28 LTE TDD: B40 WCDMA: B1/B2/B5/B8
	Transmission Data	LTE FDD: Max. 10Mbps (DL), Max. 5Mbps (UL)
		LTE TDD: Max. 8.96Mbps (DL), Max. 3.1Mbps (UL)
HSPA+: Max. 42Mbps (DL), Max. 5.76Mbps (UL)		
UMTS: Max. 384Kbps (DL), Max. 384Kbps (UL)		

Power	Battery	6000mAh rechargeable battery (Battery life varies based on settings, usage & temperature.)
	Solar	Reolink Solar Panel (optional)
	DC Power	5V/2A USB power adapter
Storage	Local Storage	Micro SD card slot (supports Max. 128GB; includes a 32GB micro SD card)
	Cloud Storage	Supports Reolink Cloud (available in some countries)
Smart Home	Smart Home	Works with Google Assistant
Working Environment	Operating Temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Weather Resistance	IP64 Weatherproof
Size & Weight	Size	Φ98 x 112mm (Φ3.7 x 4.4 in)
	Weight (Battery Included)	485g (17.1 oz)
Warranty	Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .

Δήλωση συμμόρφωσης ΕΕ (GR)

Manufacturer: REOLINK INNOVATION LIMITED

Address: FLAT/RM 705 7/F FA YUEN COMMERCIAL BUILDING 75-77 FA YUEN
STREET MONG KOK KL HONG KONG

Αυτή η δήλωση συμμόρφωσης εκδίδεται με αποκλειστική ευθύνη του κατασκευαστή και ανήκει στο ακόλουθο προϊόν:

Τύπος Προϊόντος: IP Κάμερα

Μοντέλο: Go PT Plus

Το αντικείμενο της δήλωσης που περιγράφεται παραπάνω είναι σύμφωνο με τη σχετική Νομοθεσία εναρμόνισης της Ένωσης:

- Radio Equipment Directive: 2014/53/EU
- RoHS Directive: 2011/65/EU

Έχουν εφαρμοστεί τα ακόλουθα εναρμονισμένα πρότυπα και τεχνικές προδιαγραφές:

Safety	EN 62368-1:2014+A11:2017
Health	EN 62311:2008
EMC	ETSI EN 301 489-1 V2.2.3 (2019-11) Draft ETSI EN 301 489-52 V1.1.0 (2016-11)
Radio	ETSI EN 301 908-1 V11.1.1 (2016-07) ETSI EN 301 908-2 V11.1.2 (2017-08)
RoHS	EN 50581:2012

Υπογράφηκε για και για λογαριασμό του: REOLINK INNOVATION LIMITED

Τόπος έκδοσης: Hong Kong

Ημερομηνία έκδοσης: 31-12-2021

Όνομα: Wang aijun

Θέση: Τεχνικός διευθυντής

Υπογραφή:

Wang aijun

EU Declaration of Conformity (EN)

Manufacturer: REOLINK INNOVATION LIMITED
Address: FLAT/RM 705 7/F FA YUEN COMMERCIAL BUILDING 75-77 FA YUEN
STREET MONG KOK KL HONG KONG

This declaration of conformity is issued under the sole responsibility of the manufacturer and belongs to the following product:

Product Type: IP Camera

Model: Reolink Go PT Plus

The object of the declaration described above is in conformity with the relevant Union harmonization legislation:

- Radio Equipment Directive: 2014/53/EU
- RoHS Directive: 2011/65/EU

The following harmonized standards and technical specifications have been applied:

Safety	EN 62368-1:2014+A11:2017
Health	EN 62311:2008
EMC	ETSI EN 301 489-1 V2.2.3 (2019-11) Draft ETSI EN 301 489-52 V1.1.0 (2016-11)
Radio	ETSI EN 301 908-1 V11.1.1 (2016-07) ETSI EN 301 908-2 V11.1.2 (2017-08)
RoHS	EN 50581:2012

Signed for and on behalf of: REOLINK INNOVATION LIMITED

Place of issue: Hong Kong
Date of issue: 31-12-2021
Name: Wang aijun
Position: Technical Director
Signature:

