



iXchange

Ακουστικό Bluetooth με αναδιπλούμενο καλώδιο LCD οθόνη, Application και δόνηση iXchange UA51Pro



Overview:

Με την τελευταία έκδοση της iXchange νιώσε σίγουρος για όλα! Το νέο ακουστικό της iXchange έγινε καλύτερο από ποτέ! Η LCD οθόνη σου παρέχει άνεση αφού μπορείς να δεις ενδείξεις μπαταρίας, ποιος σε καλεί, να βρεις τις αναπάντητες κλήσεις σου, να διαβάσεις πληροφορίες και στίχους από τα αγαπημένα σου τραγούδια!

Το Bluetooth ακουστικό iXchange UA51 με LCD θα σε εντυπωσιάσει και με την ευχρηστία του. Έτσι, μέσω της εφαρμογής iXchange app μπορείς να προσαρμόσεις τις ιδιότητες του ήχου, να πραγματοποιήσεις αναπαραγωγή τραγουδιών μέσω media player, σου δίνει τη δυνατότητα ειδοποίησης όταν το Smartphone σου απομακρύνεται από το ακουστικό (εμβέλεια έως 10 μέτρα), μπορείς να επιλέξεις γλώσσα για φωνητική προτροπή, έχεις τη δυνατότητα εύρεσης ακουστικού και τηλεφώνου και τέλος με την ένδειξη στάθμης μπαταρίας και με ειδοποίηση όταν είναι σε χαμηλό επίπεδο δεν θα μείνεις ποτέ χωρίς το αγαπημένο σου Bluetooth.

Τέλος, διαθέτει μεγάλη αυτονομία μπαταρίας, για έως 11 ώρες ομιλίας ή έως 13 ώρες ακρόασης μουσικής με μία πλήρη φόρτιση (διαρκεί έως 1.5 ώρα), για να μην έχεις κανένα άγχος!



Features:

Κουμπι πολλάπλών λειτουργιών

LCD οθόνη

Bluetooth®: v5.1 με BLE

Ειδοποίηση εισερχόμενης κλήσης και ειδοποίηση απομάκρυνσης συσκευής

Υποστηριζόμενα προφίλ: HSP, HFP, A2DP-AVRCP

Εύρος λειτουργίας: 10m

Θερμοκρασία λειτουργίας: 0-50 βαθμοί κελσίου


Χρόνος φόρτισης: περίπου 1.5hrs

Χρόνος Ομιλίας: Έως 11hrs

Αναπαραγωγή μουσικής: Έως 13hrs

Χρόνος αναμονής: περίπου 500hrs

Χωρητικότητα μπαταρίας: 110mAh

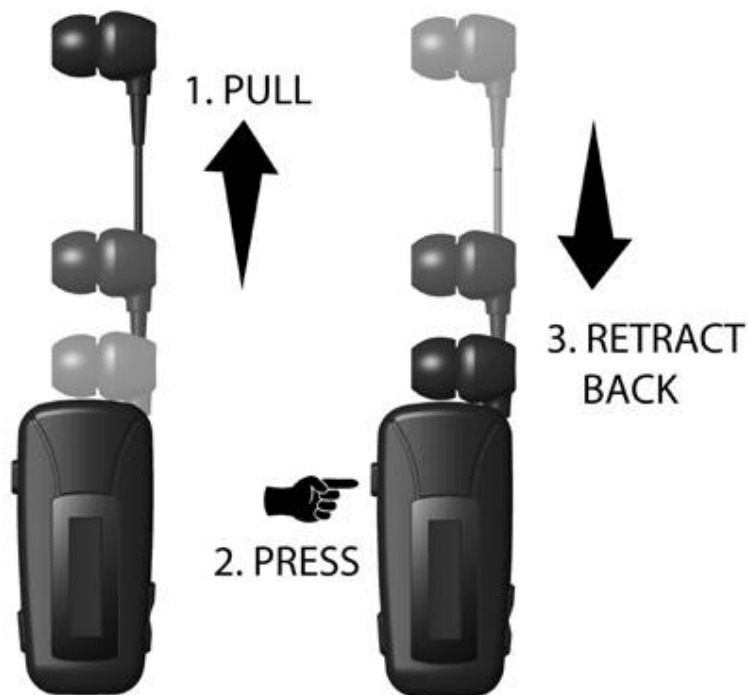



UA-51Pro LCD RETRACTABLE BLUETOOTH HEADSET


DESCRIPTION

- 1 - Multifunction button
- 2 - Cable rewind button
- 3 - MicroUSB charging port
- 4 - LCD display
- 5 - Speaker
- 6 - LED
- 7 - Volume +
- 8 - Volume -
- 9 - Clip

Thanks for choosing a iXchange product.

The UA-51Pro can be used with the most Bluetooth enable devices available on today's market.

Please read the following useful information.

TECHNICAL SPECIFICATIONS


- Bluetooth®: v5.1 with BLE
- Profiles supported: HSP, HFP, A2DP - AVRCP
- Operating Range: 10m
- Operation Temperature: 0-50 degree celsius
- Charging Time: around 1.5hrs
- Talk Time: Up to 11hrs
- Music Time: Up to 13hrs
- Standby Time: about 500hrs
- Battery Capacity: 110mAh

PACK CONTENT


- 1. Headset device
- 2. Micro USB cable
- 3. Manual
- 4. S/L Inear cushion

RETRACTABLE MECHANISM

The earpiece cord can be extended by gently pulling on the cord. The cord can be retracted (shortened) by pressing the Rewind Button.


WEARING THE DEVICE

The device is designed to clip onto your clothing or where you want.

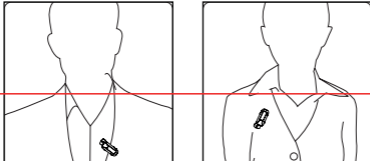
LCD DISPLAY

The **LCD** display is support

- 1. Battery capacity will be shown at home page.
- 2. Press and hold the MFB and Vol - to show the firmware version.
- 3. Caller name and phone number at incoming call. (If 2 phones are connected, the caller details on 1st connected phone will be shown, not the 2nd one.)
- 4. Missed call ID and phone number.
- 5. Song's details and lyrics. (based on the setting of music player)
- 6. Charging status and pairing status indication.


IXCHANGE UP APP

Download 'iXchange UP' APP from APP store and enjoy the below functions

- 1. Auto Bluetooth connection. (See below steps)
- 2. Alert setting for incoming call and device losing.
 - Turn ON or OFF the vibration alert
- 3. Find the phone function.
 - Turn OFF the function, press Vol + and Vol - once, "Beep" sound or vibration will play from the phone (Based on user's setting)
- 4. Find the headset function.
 - Press "Tap to find" from APP, the headset will vibrate


PRELIMINARY OPERATIONS

Insert the cable into the power source and connect the other end to MicroUSB charging socket of device to charge the battery fully. Use the MicroUSB cable supplied.

Status	LED and audio indication	LCD display
1. Charging	Red light ON	Charging logo on LCD
2. Fully charged	OFF	-
3. Low battery	Red light for every 5s and Short beep for every 20s	-
4. Out of battery	OFF	-

To extend the battery life, re-charging the battery every 3 months. Charging indication will be delayed in a few seconds if the headset has not been used for a long period of time.

PAIRING THE DEVICE WITH A MOBILE PHONE (BY IXCHANGE UP APP)

Download and install the iXchange UP APP

For iOS devices

- 1. To activate the pairing mode, press and hold the MFB until the LED flashes blue and red alternately and "Pairing" is displayed on **LCD**.
- 2. Search and select "UA-51WF-V" to complete the pairing.
- 3. Launch the APP, search and select "UA-51WF-V" and accept the "Bluetooth Pairing request at the permission on reading the phonebook" to complete the pairing.
- 4. Enjoy the APP function.

For Android devices

- 1. To activate the pairing mode, press and hold the MFB until the LED flashes blue and red alternately and "Pairing" is displayed on **LCD**.
- 2. Search and select "UA-51WF-V" to complete the pairing.
- 3. Launch the APP and enjoy the function.

PAIRING THE DEVICE WITH A MOBILE PHONE (MANUAL WAY)

- 1. Turn on the Bluetooth® function on the mobile phone.
- 2. Place the device and the mobile phone where they are visible, within arm's length from each other.
- 3. Make sure that the device is switched off.
- 4. To activate the pairing mode, press and hold the MFB until the LED flashes blue and red alternately and "Pairing" is displayed on **LCD**.
- 5. Search the device, select "UA-51WF-V" after it has been detected. When pairing, mobile phone will ask permission for phonebook, user need to approve in order to show the caller name, otherwise, the **LCD** will not display.
- 6. When the pairing is completed, the LED will flash blue, "Paired" and "Connected" are displayed on **LCD**.

PAIRING THE DEVICE WITH A SECOND MOBILE PHONE (MULTI-POINT OPERATION)

1. Pair the device with the first phone. (follow the step of "Pairing the device with a mobile phone")
 2. Turn off the device and the Bluetooth function of the first phone.
 3. Pair the device with the second phone. (follow the step of "Pairing the device with a mobile phone")
 4. Once the connection has been established with the second phone, turn on Bluetooth on the first phone and select "UA-51WF-V" if it does not connect automatically.
- For some phones, you may need to manually press "connect" to connect the device.
 - If pairing is unsuccessful, turn the device off and try again.
 - If the device or the phone have been powered off or are out of range, it will reconnect automatically after switching, if not, press MFB once to manually reconnect.

POWER ON

Press and hold the MFB until the LED flashes blue. The iXchange logo and battery capacity will display on **LCD** and the device will vibrate. The pairing mode will activate directly at the first time or after reset the device.

POWER OFF

Press and hold the MFB until the LED flashes red and the device will vibrate once.

INCOMING CALL ALERT AND ANTI-LOST ALERT



Device has a built-in vibrator, which supports

• Incoming call alert

Device will keep vibrate during the incoming call, to prevent a call missing.

• Anti-lost alert

Device will keep vibrate when it stays far away from a user, to prevent device lost.



USING THE DEVICE

IMPORTANT: The device needs to be paired with your mobile phone first. (follow the steps of "Pairing the device with a mobile phone")

• Make a call

Dial the number on your phone and the call will automatically transfer to the device.

• Last number redial

Press MFB twice, the device will redial the last caller's number.

• Voice command

Press MFB once during the call.

• Reset

Press both Volume + and Volume - for 5 seconds to activate the reset mode.

• Read battery capacity level

Press MFB once during standby mode, battery capacity level will displayed.

During an incoming call, LED light blue flashes, phone number and caller ID (if any) will be displayed on the **LCD**, the device will vibrate while ringing.

• Answer a Call

When there is an incoming call, press MFB button once [0.5 seconds] to answer a call. The music will stop playing while answering the call.

• Reject a Call

Press MFB button twice to reject the incoming call. After call rejected, a missed call phone number or caller ID (if any) will be displayed on **LCD**, and the music playing will resume.

• Volume Adjustment

There are 15 levels for upward and downward volume by pushing Volume + and Volume - button.

During music playing, name of song and singer ID (if any) will be displayed on **LCD** when you start to playing music [8 seconds], press MFB once to show again. The lyrics of song (if any) will be displayed on **LCD** based on the setting of some music player.

Volume will be lower if having notification beep and when you check the voice message from messaging Apps [whatsapp etc.]

• Stop music playing

Stop the music playing function button directly from the mobile phone.

• Song selections – FORWARD / BACKWARD

To select the next song, press Volume + button for 2 seconds, To select the previous song, press the Volume – button for 2 seconds.

• Incoming call while music playing.

When there is an incoming call from instant messaging apps or user want to dial the caller via voice dialing mode, the music will stop playing, after ending the call, the music will resume for playing.



iXchange declares that this bluetooth headset (UA-51Pro) complies with Directive 2014/53/EU.



INSTRUCTIONS FOR THE DISPOSAL OF DEVICES FOR DOMESTIC USE

This mark on the product or documentation indicates that this product must not be disposed of with other household waste at the end of its life. To avoid any damage to health or the environment due to improper disposal of waste, the user must separate this product from other types of waste and recycle it in a responsible manner to promote the sustainable re-use of the material resources.

Domestic users should contact the dealer where they purchased the product or the local government office for all information regarding separate waste collection and recycling for this type of product. Corporate users should contact the supplier and verify the terms and conditions in the purchase contract.

This product must not be disposed of along with other commercial waste. This product has a battery that cannot be replaced by the user. Do not attempt to open the device to remove the battery as this could cause malfunctions and seriously damage the product. When disposing of the product, please contact the local waste disposal authority to remove the battery. The battery inside the device was designed to be able to be used during the entire life cycle of the product.

SAFETY PRECAUTIONS

1. Unintentional depression of the retractable button could result in an injury from the force of the earpiece cord retraction.

2. Be careful when retracting the length of the earphone. Keep a safe distance between your face and the headset.

3. If you must use the headset while driving, ensure your attention is fully focused on driving safety. Be a responsible driver and abide by the local laws.

4. Place in a children's unreachable area, never allows them to play with the headset. Small parts pose as a choking hazard.

5. Obey all designated areas such as hospitals, electronically restrictive and hazardous environment that require an electrical device be switched off.

6. Turn off your headset prior to boarding on an aircraft. Do not use it while being asked by the flight attendant.

7. Never mount or store your headset over any air bag deployment area as serious injury could result upon deployment.

8. Do not attempt to disassemble the headset as it does not contain serviceable components.

9. Headset builds with battery inside and should dispose of it according to local regulations, not as a household waste.

MAINTENANCE

1. Do not yank or forcibly pull the earphone cord.

2. Consider turning your headset off before placing it in your pocket or bag. If the MFB is accidentally pushed, your mobile phone may place an unintended call.

3. Do not expose the headset to liquid or humidity, as it is not waterproof.

4. Do not use abrasive cleaning solvents to clean the headset.

5. Do not expose the headset to extremely high or low temperatures.

6. Do not expose your headset to contact with sharp objects as this will cause scratches and damage.

7. Do not stick anything inside the headset as this may damage internal components.

8. Do not attempt to replace the headset's battery. It is built-in and is not removable.

9. Use only the manufacturer supplied charger when charging the headset.

10. Do not disassemble the charger as it may expose you to dangerous voltages or other risks. Incorrect reassembly can cause electric shock when the headset is subsequently used.





Channel Enterprises (Hong Kong) Limited

Room 2006, 20/F., Lucida Ind. Bldg., 43-47 Wang Lung Street, Tsuen Wan, N.T., Hong Kong
Tel.: (852) 2432 1515 Fax: (852) 2498 4987 E-mail: channel@ce.com.hk Web.: www.ce.com.hk

DECLARATION OF CONFORMITY

We declare that the following products

Product Name: Bluetooth Headset

Model: UA-25, UA-24, UA-28, UA-42, UA-51 PRO, UA-41, UA-30

comply with essential requirements and other relevant provisions of the

following directives:

2014/53/EU

2015/863/EU (ROHS)

Is in Conformity with the following European Norms/Standards:

EN62368-1:2014 + A11:2017

ETSI EN 304 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.2.4 (2020-09)

EN 55032:2015

EN 55035:2017

ETSI EN 300 328 V2.2.2 (2019-07)

EN 62479:2010

EN 50663: 2017

Date and place of issue

26/5/2022, China

For and behalf of

Channel Enterprises Limited



Chan Yuet Ming, Director





Channel Enterprises (Hong Kong) Limited

Room 2006, 20/F., Lucida Ind. Bldg., 43-47 Wang Lung Street, Tsuen Wan, N.T., Hong Kong
Tel.: (852) 2432 1515 Fax: (852) 2498 4987 E-mail: channel@ce.com.hk Web.: www.ce.com.hk

ΔΗΛΩΣΗ ΣΥΜΜΟΡΦΩΣΗΣ

Δηλώνουμε ότι τα ακόλουθα προϊόντα

Όνομα Προϊόντος: Ακουστικά Bluetooth

Μοντέλο: UA-25, UA-24, UA-28, UA-42, UA-51 PRO, UA-41, UA-30

Συμμορφώνονται με τις βασικές απαιτήσεις και άλλες διατάξεις των ακόλουθων οδηγιών:

2014/53/EU

2015/863/EU (ROHS)

Συμμορφώνονται με τους ακόλουθους Ευρωπαϊκούς Κανόνες/Πρότυπα:

EN62368-1:2014 + A11:2017

ETSI EN 304 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.2.4 (2020-09)

EN 55032:2015

EN 55035:2017

ETSI EN 300 328 V2.2.2 (2019-07)

EN 62479:2010

EN 50663: 2017

Τόπος και ημερομηνία έκδοσης

26/5/2022, China

Για λογαριασμό και εξ' ονόματος της

Channel Enterprises Limited



Chan Yuet Ming, Director

